


PORTABLE GRINDING & LAPPING MACHINES

■ unigrind HTS

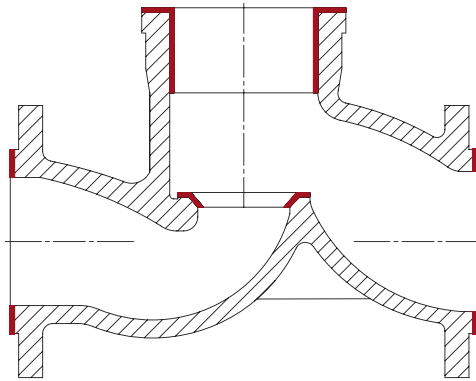

HTS 150

Portable High Speed grinding machine for flat and tapered sealing surfaces in:

Control valves, globe valves, check valves, safety relief valves

Advantages:

- Accurate centring and adjusting the machine
- Precise grinding of flat and tapered surfaces
- Control and correction of existing seat surfaces
- Automatic and manual feed

Drives:

- Pneumatic 90 psi (5-7 bar)

Options:


- Grinding of cylindrical surfaces with bore grinding device
- Dressing device for grinding stones
- Cubic Boron Nitride grinding tools

Comment:

The working range of the HTS machine can be increased with additional tools. Slight changes in the working range are possible.

Type:	Working ranges:	Inches:
HTS 150	DN 50 - 250 mm	2" - 10"
HTS 400	DN 80 - 600 mm	3" - 24"
HTS 800	DN 200 - 1000 mm	8" - 40"

The max. working range of HTS 400 diameter 700 mm

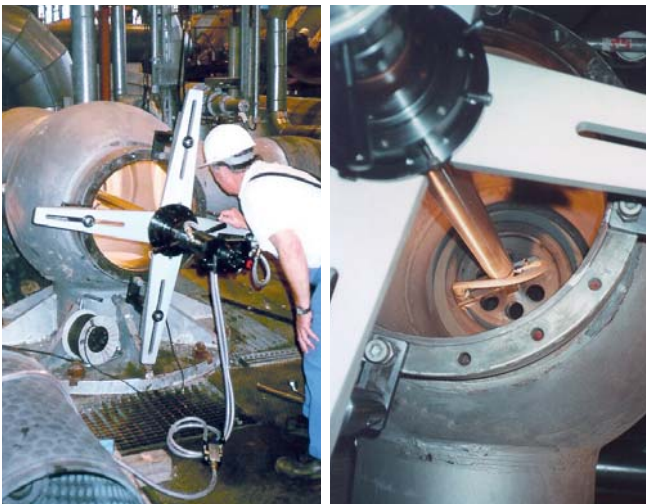

HTS 800 grinding on-site



HTS transport container with accessories



HTS 400 grinding on-site

