

Mechanical JAW PULLERS

1-25 Ton


2 & 2/3 Jaw Pullers

Pullers designed to pull gears, bearings and countless other press fitted parts.


BEARING MAINTENANCE

Choosing the right size puller:


Compare the “reach” and “spread” of the pulling job with that of the pullers listed. The puller selected must have dimensions greater than those of the job.





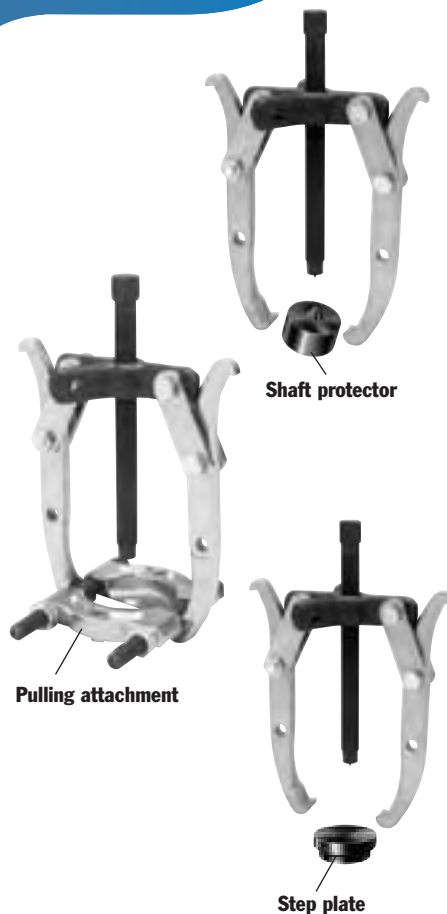

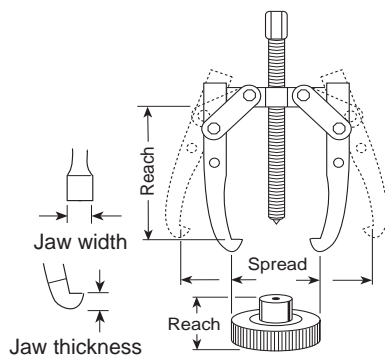

Fed. Spec.: GGG-P-00781-D












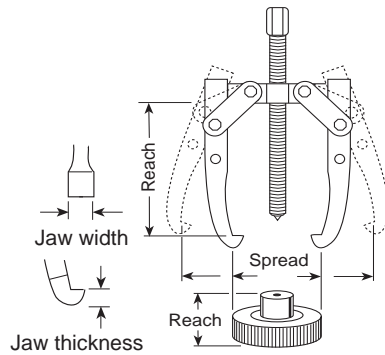



- Grip-O-Matic® feature on all pullers. The harder the pull, the tighter the grip for removing gears, bearings and countless other press fitted parts.
- 2-way, 3-way and 2/3 way combination pullers make it easy to select a specific puller for a specific application.
- Forged from high quality steel, heat treated and subjected to rigorous tests which exceed rated puller capacity.



Order No.	Max.		Screw Size (in.)	Jaw		Capacity, Style and Weight	
	Reach (mm)	Spread (mm)		Thickness (mm)	Width (mm)		
  1020 1021	1020	54	82,6	$\frac{5}{16}$ -24 x 98,4 mm	3,5	6,4	1-Ton, 2-Jaw; 0,14 kg
	1021	54	82,6	$\frac{5}{16}$ -24 x 98,4 mm	3,5	6,4	1-Ton, 3-Jaw; 0,23 kg
  1022 1023	1022	85,7	101,6	$\frac{3}{8}$ -24 x 124 mm	Upper 4,8 Lower 3,2	Upper 6,4 Lower 12,7	2-ton, 2-Jaw; 0,4 kg (Reversible Jaws)
	1023	85,7	121	$\frac{3}{8}$ -24 x 124 mm	Upper 4,8 Lower 3,2	Upper 6,4 Lower 12,7	2-ton, 2/3-Jaw; 0,6 kg (Reversible Jaws)
  1024 1026	1024	83	152	$\frac{9}{16}$ -20 x 176 mm	Upper 7,9 Lower 6,4	Upper 9,5 Lower 19,1	5-Ton, 2-Jaw; 0,8 kg (Reversible Jaws)
	1026	83	178	$\frac{9}{16}$ -20 x 176 mm	Upper 7,9 Lower 6,4	Upper 9,5 Lower 19,1	5-Ton, 2/3-Jaw; 1,3 kg (Reversible Jaws)

- Alloy steel heads are forged for maximum strength.
- Forcing screw threads are rolled, not cut. This process creates a smoother and stronger thread.
- Heat treated alloy steel cross bolts for maximum shear strength.
- Machined puller jaw toes produce larger and stronger pulling toes.



Order No.	Max.		Screw Size (in.)	Jaw		Capacity, Style and Weight	
	Reach (mm)	Spread (mm)		Thickness (mm)	Width (mm)		
 	1025	140	152	$\frac{9}{16}$ -20 x 176 mm	Upper 7,9 Lower 6,4	Upper 9,5 Lower 19,1	5-Ton, Long 2-Jaw; (Reversible Jaws) 0,9 kg
	1027	140	178	$\frac{9}{16}$ -20 x 178 mm	Upper 7,9 Lower 6,4	Upper 9,5 Lower 19,1	5-Ton, Long 2/3-Jaw; (Rev. Jaws) 1,5 kg
 	1035	127	229	$\frac{11}{16}$ -18 x 229 mm	Upper 7,9 Lower 8,7	Upper 25,4 Lower 25,4	7-Ton, 2-Jaw; (Reversible Jaws) 2 kg
	1037	127	267	$\frac{11}{16}$ -18 x 229 mm	Upper 7,9 Lower 8,7	Upper 25,4 Lower 25,4	7-Ton, 2/3-Jaw; (Rev. Jaws) 2,8 kg
 	1036	222	241	$\frac{11}{16}$ -18 x 229 mm	8,7	25,4	7-Ton, Long 2-Jaw; 2,3 kg
	1038	222	279	$\frac{11}{16}$ -18 x 229 mm	8,7	25,4	7-Ton, Long 2/3-Jaw; 3,3 kg
 	1039	279	318	$\frac{13}{16}$ -16 x 305 mm	14,3	25,4	13-Ton, 2-Jaw; 4,8 kg
	1040	387	279	$\frac{13}{16}$ -16 x 305 mm	14,3	25,4	13-Ton, Long 2-Jaw; 5,9 kg
	1041	279	356	$\frac{13}{16}$ -16 x 305 mm	14,3	25,4	13-Ton, 2/3-Jaw; 6,7 kg
	1042	387	432	$\frac{13}{16}$ -16 x 305 mm	14,3	25,4	13-Ton, Long 2/3-Jaw; 8,3 kg
 	1043	368	356	1-14 x 343 mm	20,6	32,5	17 $\frac{1}{2}$ -Ton, Long 2-Jaw; 8,3 kg
	1044	476	406	1-14 x 343 mm	20,6	32,5	17 $\frac{1}{2}$ -Ton, Long 2-Jaw; 11,8 kg
	1045	386	356	1-14 x 343 mm	20,6	32,5	17 $\frac{1}{2}$ -Ton, 3-Jaw; 15 kg
	1046	476	406	1-14 x 343 mm	20,6	32,5	17 $\frac{1}{2}$ -Ton, Long 3-Jaw; 16,8 kg
 	1048	565	508	1 $\frac{1}{4}$ -12 x 422 mm	27	38,1	25-Ton, Long 2-Jaw; 19,4 kg
	1050	565	508	1 $\frac{1}{4}$ -12 x 422 mm	27	38,1	25-Ton, Long 3-Jaw; 27,2 kg

For puller piece part identification, order Power Team parts catalog PC97